



## STANDARD DRIVEWAY DITCH CROSSING

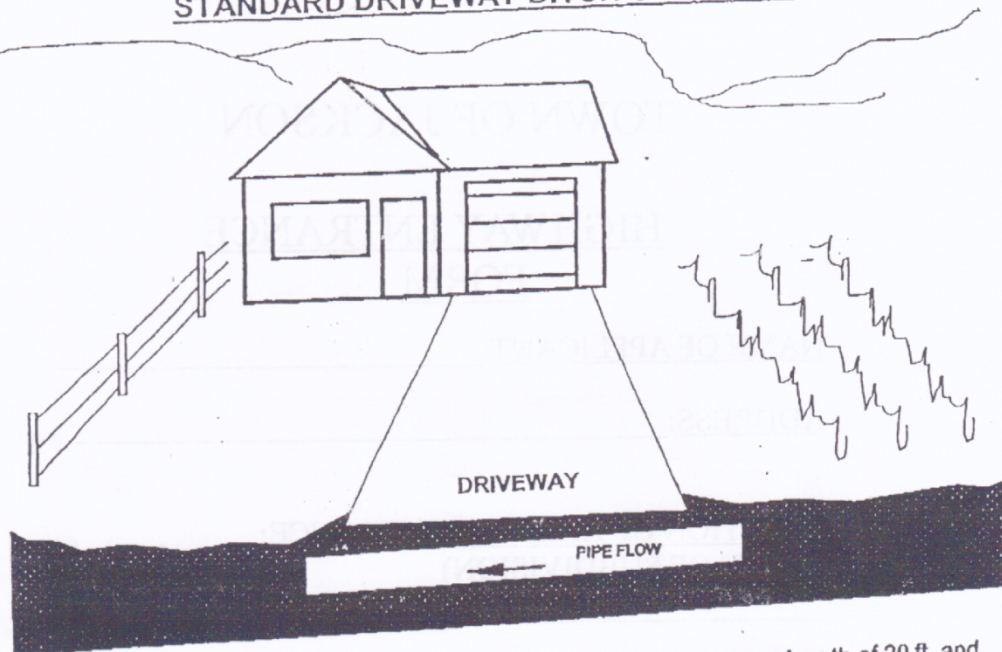

1. Pipe must be not less than 12 inches inside diameter with a minimum length of 20 ft. and be of either reinforced concrete, corrugated metal or A.D.S. pipe. (no substitutes)
2. Pipe shall be placed so that inside flow line of pipe is at bottom of ditch and sloped true to ditch grade, maintaining free and unobstructed flow.
3. Highway shoulder must not be altered.
4. Any rise in driveway shall occur on the backslope of ditch line so that drainage from driveway will flow into the ditch and not into the highway.

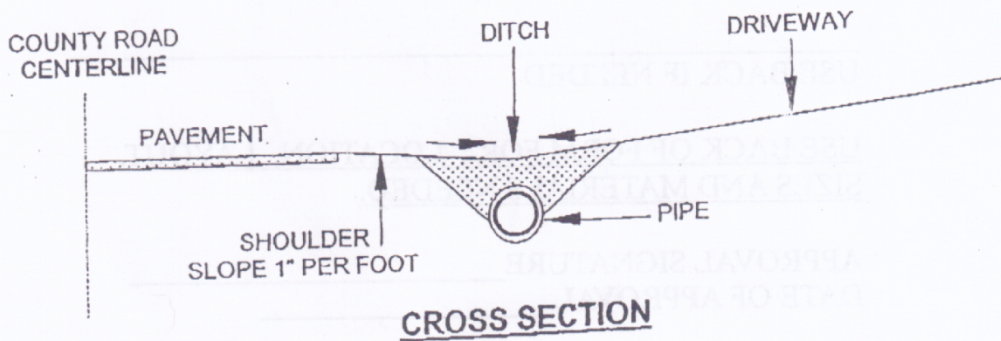

**TOWN OF JACKSON PLANNING BOARD  
HIGHWAY ENTRANCE FORM**

Name of Applicant: \_\_\_\_\_

Address: \_\_\_\_\_

Location of Highway Entrance (name of subdivision):  
\_\_\_\_\_

Number of Highway Cuts: \_\_\_\_\_                      Number of Culverts: \_\_\_\_\_

Special Requirements:  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

\*Use diagram for: location, layout, sizes and materials needed.\*

**Review and approved by Highway Superintendent**

Approval Signature \_\_\_\_\_

Date of Approval \_\_\_\_\_